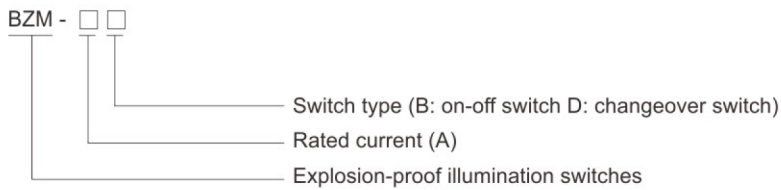


## Installation Switches BZM Series Explosion-proof Illumination Switches



- ◆ Explosion protection to
  - CENELEC
  - IEC
  - NEC
- ◆ Can be used in
  - Zone 1 and Zone 2
  - Zone 21 and Zone 22
  - Class I, Zone 1 and Zone 2
  - Class I, Division 1, Groups A, B, C, D
- ◆ Copper-free Aluminium Alloy enclosure, powder coated surface.
- ◆ Two options:
  - On-off switch
  - Changeover switch

### ■ Catalogue number logic



### Selection table

Type/Ordering code	Chart of contact	Corresponding switch	Weight (kg)																																				
BZM-16B	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> <td>0</td> <td>I</td> <td></td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> <td>180°</td> <td>270°</td> <td></td> </tr> <tr> <td>1°</td> <td></td> <td>x</td> <td></td> <td>x</td> <td>°2</td> </tr> <tr> <td>3°</td> <td></td> <td>x</td> <td></td> <td>x</td> <td>°4</td> </tr> <tr> <td>5°</td> <td></td> <td>x</td> <td></td> <td>x</td> <td>°6</td> </tr> <tr> <td>7°</td> <td></td> <td>x</td> <td></td> <td>x</td> <td>°8</td> </tr> </table>		0	I	0	I			0°	90°	180°	270°		1°		x		x	°2	3°		x		x	°4	5°		x		x	°6	7°		x		x	°8		0.85
	0	I	0	I																																			
	0°	90°	180°	270°																																			
1°		x		x	°2																																		
3°		x		x	°4																																		
5°		x		x	°6																																		
7°		x		x	°8																																		
BZM-25B	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> <td>0</td> <td>I</td> <td></td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> <td>180°</td> <td>270°</td> <td></td> </tr> <tr> <td>1°</td> <td></td> <td>x</td> <td></td> <td>x</td> <td>°2</td> </tr> <tr> <td>3°</td> <td></td> <td>x</td> <td></td> <td>x</td> <td>°4</td> </tr> <tr> <td>5°</td> <td></td> <td>x</td> <td></td> <td>x</td> <td>°6</td> </tr> <tr> <td>7°</td> <td></td> <td>x</td> <td></td> <td>x</td> <td>°8</td> </tr> </table>		0	I	0	I			0°	90°	180°	270°		1°		x		x	°2	3°		x		x	°4	5°		x		x	°6	7°		x		x	°8		0.95
	0	I	0	I																																			
	0°	90°	180°	270°																																			
1°		x		x	°2																																		
3°		x		x	°4																																		
5°		x		x	°6																																		
7°		x		x	°8																																		
BZM-16D	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1/3°</td> <td></td> <td>x</td> <td></td> <td></td> <td>°2</td> </tr> <tr> <td></td> <td></td> <td></td> <td>x</td> <td></td> <td>°4</td> </tr> <tr> <td>5/7°</td> <td></td> <td>x</td> <td></td> <td></td> <td>°6</td> </tr> <tr> <td></td> <td></td> <td></td> <td>x</td> <td></td> <td>°8</td> </tr> </table>		0	I					0°	90°				1/3°		x			°2				x		°4	5/7°		x			°6				x		°8		0.85
	0	I																																					
	0°	90°																																					
1/3°		x			°2																																		
			x		°4																																		
5/7°		x			°6																																		
			x		°8																																		
BZM-25D	<table border="1"> <tr> <td></td> <td>0</td> <td>I</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>0°</td> <td>90°</td> <td></td> <td></td> <td></td> </tr> <tr> <td>1/3°</td> <td></td> <td>x</td> <td></td> <td></td> <td>°2</td> </tr> <tr> <td></td> <td></td> <td></td> <td>x</td> <td></td> <td>°4</td> </tr> <tr> <td>5/7°</td> <td></td> <td>x</td> <td></td> <td></td> <td>°6</td> </tr> <tr> <td></td> <td></td> <td></td> <td>x</td> <td></td> <td>°8</td> </tr> </table>		0	I					0°	90°				1/3°		x			°2				x		°4	5/7°		x			°6				x		°8		0.95
	0	I																																					
	0°	90°																																					
1/3°		x			°2																																		
			x		°4																																		
5/7°		x			°6																																		
			x		°8																																		

# Zones 1&2; 21&22

## Installation Switches BZM Series Explosion-proof Illumination Switches

### Technical data


#### Explosion-proof illumination switches BZM-□□


#### Explosion protection

Global (IECEX) IECEx LCI 08. 0008

Gas and dust Ex d IIC T6 Gb  
Ex tb IIIC T80°C Db

Europe (ATEX) LCIE 06 ATEX 6068

Gas and dust  II 2 G Ex d IIC T6 Gb

 II 2 D Ex tb IIIC T80°C Db

#### Certificates

IECEX; ATEX; CU-TR

#### Conformity to standards

EN 60079-0, EN 60079-1, EN 60079-31

IEC 60079-0, IEC 60079-1, IEC 60079-31

#### Enclosure material

Copper-free Aluminium Alloy, powder coated surface

#### Enclosure colour

Window grey (RAL7040)

#### Switch function

On-off switch or changeover switch

#### Exposed fastener

Stainless steel

#### Rated voltage

Max. 250V AC

#### Rated current

16A, 25A

#### Degree of protection

IP66

#### Ambient temperature

-60°C~+60°C

#### Internal&external earthing

M4/M5

#### Cable connection

3 x (2.5~4)mm<sup>2</sup>

#### Cable entries





Standard 2 x M25 x 1.5 plugs

2 x NPT3/4" plugs on request

#### Cable gland(optional)

DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~29.

### Spare parts

Built-in switch	Rated voltage/current	Ordering code	Weight (kg)
 	250V/16A	30001	0.10
	250V/25A	30002	0.20
 	250V/16A	30003	0.10
	250V/25A	30004	0.20



### Dimension drawings (all dimensions in mm) - subject to alteration

